




NUP BEARING LTD

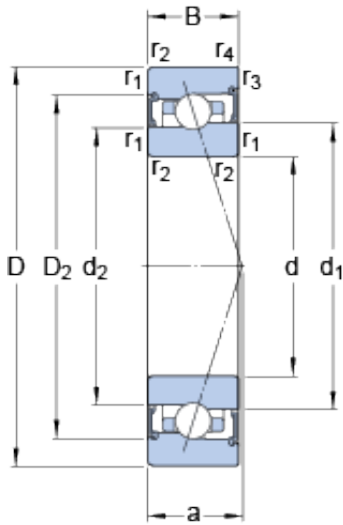

75 mm x 115 mm x 20 mm skf S7015 CB/P4A Super-precision Angular contact ball bearings

Bearing No. S7015 CB/P4A

S7015 CB/P4A Bearing 2D drawings and 3D CAD models

Size	115x75x20 mm
Bore Diameter	115 mm
Outer Diameter	75 mm
Width	20 mm
d	75 mm
D	115 mm
B	20 mm
d ₁	90 mm
d ₂	88.2 mm
D ₂	102.8 mm
r _{1,2} - min.	1.1 mm
r _{3,4} - min.	0.6 mm
a	22.3 mm
d _a - min.	81 mm
d _a - max.	89.2 mm
d _b - min.	81 mm
d _b - max.	87.4 mm
D _a - max.	109 mm
D _b - max.	111.8 mm
r _a - max.	1 mm
r _b - max.	0.6 mm
Basic dynamic load rating - C	19.9 kN
Basic static load rating - C ₀	17.6 kN
Fatigue load limit - P _u	0.75 kN



NUP BEARING LTD

Limiting speed for grease lubrication	16000 r/min
Ball - D_w	7.938 mm
Ball - z	30
Calculation factor - f_0	9.7
Preload class A - G_A	50 N
Preload class B - G_B	130 N
Preload class C - G_C	390 N
Calculation factor - f	1.08
Calculation factor - f	1
Calculation factor - f_{2A}	1
Calculation factor - f_{2B}	1.02
Calculation factor - f_{2C}	1.05
Calculation factor - f_{HC}	1
Preload class A	50 N/micron
Preload class B	65 N/micron
Preload class C	104 N/micron
d_1	90 mm
d_2	88.2 mm
D_2	102.8 mm
$r_{1,2}$ min.	1.1 mm
$r_{3,4}$ min.	0.6 mm
d_a min.	81 mm
d_a max.	89.2 mm
d_b min.	81 mm
d_b max.	87.4 mm
D_a max.	109 mm
D_b max.	111.8 mm
r_a max.	1 mm
r_b max.	0.6 mm
Basic dynamic load rating C	26.5 kN



NUP BEARING LTD

Basic static load rating C_0	29 kN
Fatigue load limit P_u	0.75 kN
Attainable speed for grease lubrication	16000 r/min
Ball diameter D_w	7.938 mm
Number of balls z	30
Preload class A G_A	50 N
Static axial stiffness, preload class A	50 N/ μ m
Preload class B G_B	130 N
Static axial stiffness, preload class B	65 N/ μ m
Preload class C G_C	390 N
Static axial stiffness, preload class C	104 N/ μ m
Calculation factor f	1.08
Calculation factor f_1	1
Calculation factor f_{2A}	1
Calculation factor f_{2B}	1.02
Calculation factor f_{2C}	1.05
Calculation factor f_{HC}	1
Calculation factor f_0	9.7
Mass bearing	0.7 kg